



# VH200-F10 & VH410-F20

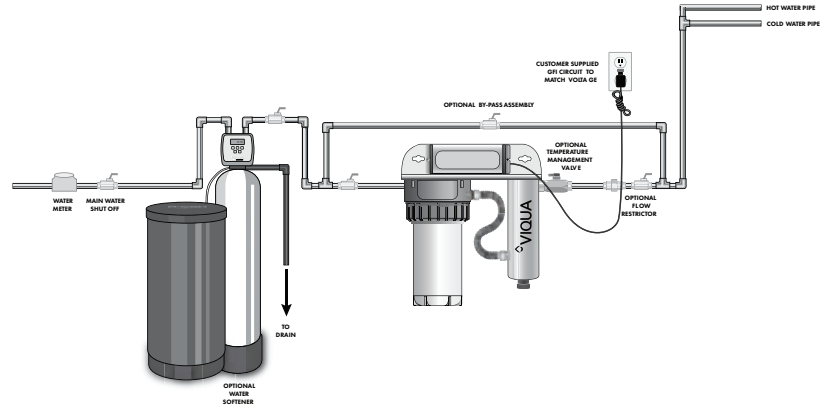

## Specifications

MODEL	VH200-F10	VH410-F20
<b>FLOW RATES</b> (@ 95% UVT)		
US Public Health (16 mJ/cm <sup>2</sup> )	16 GPM (60 lpm) (3.6 m <sup>3</sup> /hr)	34 GPM (120 lpm) (7.8 m <sup>3</sup> /hr)
VIQUA Standard (30 mJ/cm <sup>2</sup> )	9 GPM (34 lpm) (2.0 m <sup>3</sup> /hr)	18 GPM (70 lpm) (4.2 m <sup>3</sup> /hr)
NSF/EPA (40 mJ/cm <sup>2</sup> )	7 GPM (26 lpm) (1.6 m <sup>3</sup> /hr)	14 GPM (54 lpm) (3.3 m <sup>3</sup> /hr)
<b>DIMENSIONS</b>		
Chamber	17" x 10" x 18" (43 cm x 26 cm x 45 cm)	17" x 10" x 28" (43 cm x 26 cm x 71 cm)
Controller	7.25" x 3.25" x 2.5" (18.6 cm x 8.1 cm x 6.4 cm)	7.25" x 3.25" x 2.5" (18.6 cm x 8.1 cm x 6.4 cm)
Inlet/Outlet Port Size	1" MNPT Inlet/1" x 3/4" combo*	1" MNPT Inlet/1" x 3/4" combo*
<b>ELECTRICAL</b>		
Voltage	100-240V / 50/60 Hz	100-240V / 50/60 Hz
Power Consumption	35 W	60 W
Maximum Operating Pressure	125 psi (8.62 bar)	125 psi (8.62 bar)
Influent Water Temperature	2-40°C (36-104°F)	2-40°C (36-104°F)
<b>FEATURES</b>		
Visual "Power On"	YES	YES
Chamber Material	304 SS	304 SS
Visual Lamp Life Remaining	YES	YES
Audible Lamp Life Failure	YES	YES
Audible Lamp Replacement Reminder	YES	YES
UV Sensor	NO	NO
Visual Lamp Life Remaining	YES	YES

VH200-F10 & VH410-F20 DOSE CURVES

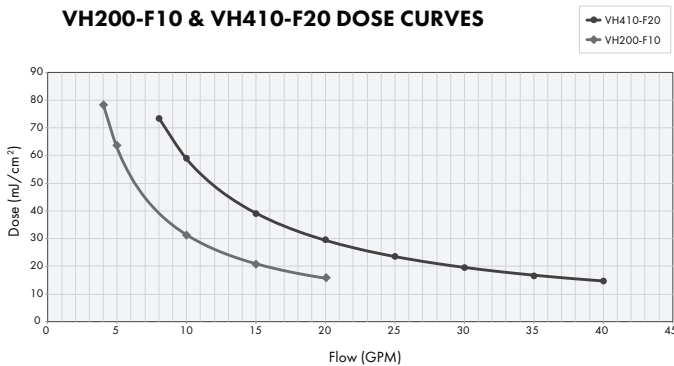

## Water Quality Parameters

Hardness < 7 grains (120 mg/L)      Iron < 0.3 mg/L      Tannins < 0.1 mg/L



**877.984.1822**  
 culliganiswater.com

\* /2B - BSP